


MODEL 1001 / 1002 / 1003 LOW-COST OEM PRESSURE TRANSDUCER



STANDARD WIRING

WIRE	MODEL 1001	WIRE	MODEL 1002	WIRE	MODEL 1003
1/RED	+EXC	1/RED	+EXC	1/WHT	N/C
2/GRN	+SIG	2/BLK	-EXC/SIG	2/BLK	-EXC/SIG
3/WHT	-SIG	3/WHT	+SIG	3/RED	+EXC/SIG
4/BLK	-EXC	GND/SHIELD	N/C	GND/SHIELD	N/C

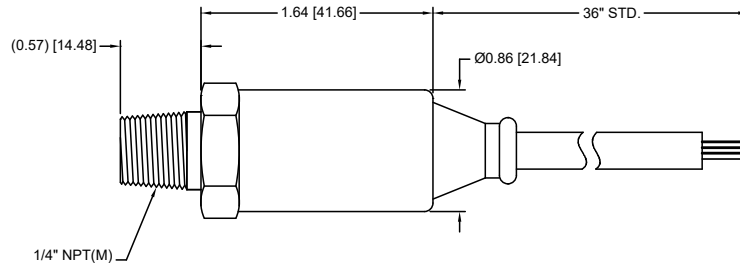

Inches (mm)

**REF DIMENSIONS ONLY.
CONSULT FACTORY FOR ACTUAL DIMENSIONS.**

PRODUCT OVERVIEW:

The Model 1001/1002/1003 from GP:50 is a family of lower cost, industrial grade OEM pressure transducers, featuring corrosion-resistant, all stainless steel wetted parts and housings. Series transducers are ideal for higher volume pressure monitoring applications, particularly where lower costs are required, yet where the need for precision measurement accuracy remains. Units are available with choice of 4-20 mA, 0 to 5 Vdc, 0 to 10 Vdc or mV/V output, as well as various electrical connection and pressure port options. Typical applications for the Model 1001/1002/1003 include off-road vehicle, HVAC/R, hydraulic and pneumatic control systems, pumps and compressors, and industrial engine pressure monitoring.

FEATURES:

- Low-cost, high reliability
- Up to 0.25% FSO accuracy
- Compact 0.870" diameter
- Rugged, all welded construction
- NEMA - 4X/IP65 rated
- CE Directives: EMC, PED, ROHS

APPLICATIONS:

- Automotive
- Industrial OEM
- On-board vehicle
- Compressor controls
- Pneumatic/hydraulic controls
- Pump controls

OPTIONS:

- 4-20 mA, 0-5 Vdc, 0-10 Vdc and mV/V outputs available
- Alternate connectors & pressure ports

GP:50 MODEL 1001 / 1002 / 1003

REFERENCE SPECIFICATIONS

Standard configurations shown, consult factory for other options

ELECTRICAL	
Output Signal:	(1001) 3.0 to 10.0 mV/V (1002) 0 to 5 Vdc, 0 to 10 Vdc (1003) 4-20 mA
Excitation Voltage:	(1001) 3.5 to 15 Vdc (1002, 1003) 9 to 32 Vdc
Compliance:	CE directives: EMC, PED, ROHS
Circuit Protection:	Reverse polarity
Response Time:	<5 ms

MATERIALS OF CONSTRUCTION	
Wetted Parts:	316 stainless steel or 17-4 stainless steel
Housing:	316 stainless steel
Internal Fill:	May contain Silicone oil fill (consult factory for alternatives)

ACCURACY (BFSL): Hysteresis, non-Linearity & Repeatability @ +70 °F	
Standard:	±0.5% FSO
Improved:	±0.25% FSO
Zero Balance & FSO:	±1.0% FSO @ +70 °F

MECHANICAL	
Process Connection:	¼" NPT (M) standard (other options available)
Electrical Connection:	36" long, 24 AWG, 4 conductor cable (Other options available)
Proof Pressure:	1.5X FSO
Burst Pressure:	3X FSO or 17,500 PSIG (1,207 BAR), whichever is less
Approximate Weight:	<4 oz. (113 g)

PRESSURE RANGES	
0 to 15 thru 0 to 10K PSI (1,034 mBAR thru 689 BAR), gauge, vacuum, and absolute pressure reference available	

THERMAL SPECIFICATIONS	
Operating Range:	-40 °F to +180 °F (-40 °C to +82 °C)
Compensated Range:	0 °F to +180 °F (-17.7 °C to +82 °C)
Storage Ambient:	-40°F to +250 °F (-40 °C to +121 °C)
Effect on Zero/Span:	<±2.0% FSO/100 °F

